



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

MODE DECOMPOSED J-INTEGRAL FOR 3D CRACK PROBLEMS USING A COHESIVE ZONE MODEL

Lindgaard, Esben; Carreras, Laura; Bak, Brian Lau Verndal; Renart, Jordi ; Turon, Albert

Published in:

Proceedings of 6th ECCOMAS Thematic Conference on the Mechanical Response of Composites

Publication date:

2017

Document Version

Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Lindgaard, E., Carreras, L., Bak, B. L. V., Renart, J., & Turon, A. (2017). MODE DECOMPOSED J-INTEGRAL FOR 3D CRACK PROBLEMS USING A COHESIVE ZONE MODEL. In *Proceedings of 6th ECCOMAS Thematic Conference on the Mechanical Response of Composites*

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

MODE DECOMPOSED J -INTEGRAL FOR 3D CRACK PROBLEMS USING A COHESIVE ZONE MODEL

Esben Lindgaard^{1*}, Laura Carreras², Brian L.V. Bak¹, Jordi Renart², Albert Turon²

¹Department of Mechanical and Manufacturing Engineering, Aalborg University, Denmark

²AMADE, University of Girona, Spain

*elo@m-tech.aau.dk

The assessment of energy available for crack growth is commonly determined by means of the J -integral [1]. Its general expression at a point on a three-dimensional crack front is a path independent combination of a contour integral and a surface integral defined over the area enclosed by the contour [2]. However, only the contour integral is retained when applying the J -integral to a cohesive zone model, since its path independence is employed to shrink the integration contour to the cohesive interface (Figure 1). Moreover, the integration domain of the pointwise-evaluated J -integral is in a plane perpendicular to the crack front and coinciding with the crack propagation direction. For this reason, the proper identification of the crack growth direction, usually assumed to be normal to the crack front, is required.

In this work, an expression for the J -integral evaluation in three-dimensional crack fronts using cohesive elements is presented in conjunction with a crack propagation direction criterion that can be evaluated at element level. The formulation, when employed to compute the mode-decomposed J -integral in several specimens under different mode ratios (I, II and III), leads to results in agreement with the VCCT predictions.

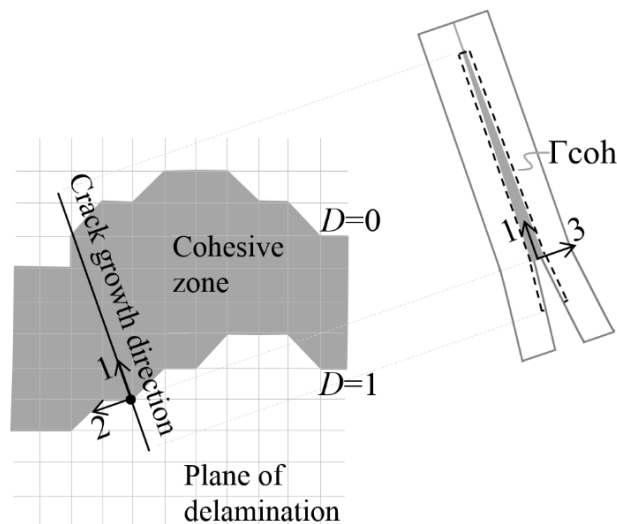


Figure 1. Integration contour of the J -integral in a 3D cohesive zone model.

References

[1] Rice J. (1968) A path independent integral and the approximate analysis of strain concentration by notches and crack. *Journal of Applied Mechanics*, **35**(2), 379-386.

[2] Blackburn W.S. (1972) Path independent integrals to predict onset of crack instability in an elastic plastic material. *Journal of Fracture Mechanics*, **8**, 343-346.